

Parts needed to mount the TEPIKO and PIKO-ZM profile



Mounting track (A)



Profile (B)



Small end cap (C)



Large end cap (D)



Protective insert (E)



Cover (F)



LED Strip (G)



Clip (H)


Elementy niezbędne przy czynnościach montażowych:

- glue
- gypsum
- paint
- driller


NOTE! All LED strips must be connected to a 12 V or 24 V power supply.

IMPORTANT: The manual presents the simplest mounting procedure. More mounting procedures and related accessories can be found at klusdesign.eu


1. Drill a hole in the mounting strip (A).

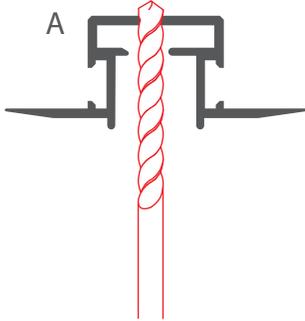


2. Insert the large end cap (D) into the mounting strip (A), and then place the protective insert (E) in it.

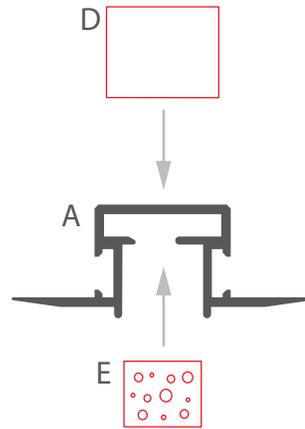


3. Connect the power cable and run it through the hole drilled in the mounting strip. Attach the strip to the mounting surface with glue.

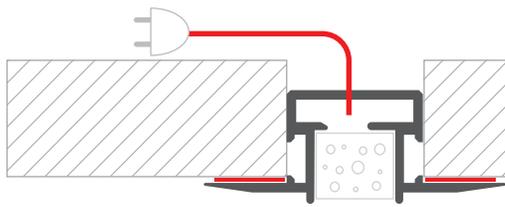

4. Apply plaster finish, covering the wings of the mounting strip. The protective insert protects the inside.

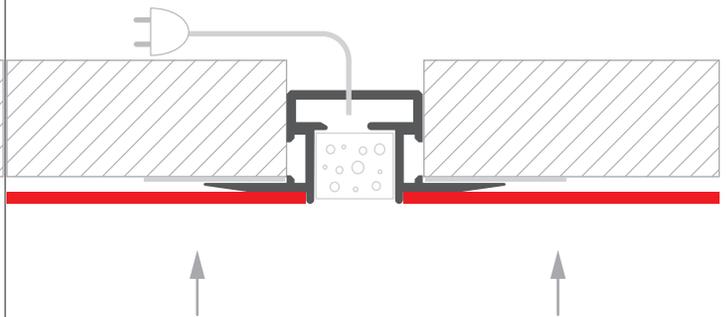

5. Remove the protective insert (E).

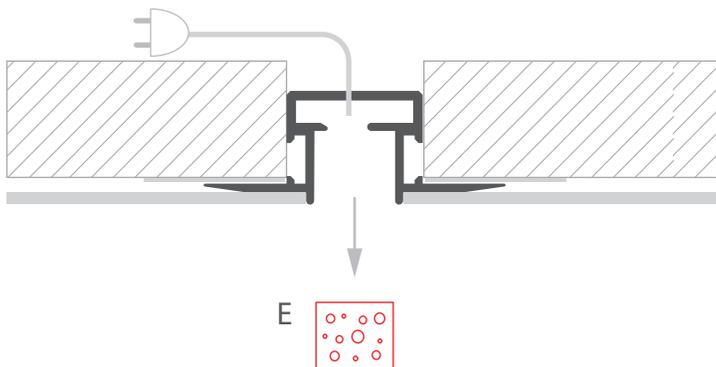


6. Drill a hole for the power cable in the profile (B).



7. Slide the clips (H) into the extrusion (B).



8. Attach the LED strip (G) with the power cable in the profile (B) using glue. Insert the cover (F) and small end caps (C).

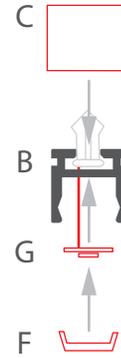

9. Snap the assembled lighting fixture in the mounting strip.

