

Reference: XZ15CN02  
EAN13: 8050997653194

## Electric cable for String Lights, covered by linen Grey fabric CN02 - UV resistant



### Description

Never settle on outdoor lighting thanks to Filé, the customisable flat rectangular outdoor UV resistant string light system. The system's high UV resistance guarantees durability and vibrant colours even after prolonged exposure to sunlight.

What makes these string lights perfect for outdoor use?

Thanks to the Filé system's IP44 protection degree, the flat rectangular outdoor UV resistant string lights efficiently withstand humidity, water splashes and infiltration of any solid above 1mm in size. They should however not be directly exposed to rain, so we recommend storing them away when you don't need them or in case of potential storms.

How to: design the perfect string light for any outdoor space

Browse our website to find the ideal cable, lamp holder and accessories to customise your string light and adapt it to your specific needs. The lamp holder can also be placed at any point along the cable, making the product even more versatile.

How many metres of string lights can you purchase?/h2>

Easily purchase the exact number of metres necessary to create a flawless string light composition, along with as many lamp holders as needed.

How can grey linen improve the aesthetic of your outdoor illumination?

When used as lining for UV resistant cables, the CN02 natural grey linen is guaranteed to add elegance and charm to your outdoor lamps or illumination system. Its achromaticity (just like black and white) also makes it extremely easy to pair with other colours and styles.

What does UV resistant cable actually mean?

It means the fabric used to line these cables was designed to not only endure but fully resist UV rays, which make up around 10% of sunlight. The colour of UV resistant cables remains vibrant and doesn't tend to fade over time, even when they are consistently exposed to sunlight. This also means that prolonged exposure to sunlight will not result in the deterioration of the product's materials and performance.

## Data Sheet

2x1,5 flat rectangular cable, measurements mm 13,5 x 5,5 compliant with EN 60228/ IEC 60228.

Flexible class 5 conductor in red electrolytic copper compliant with EN 60228/ IEC 60228

Cable type: H05RNH2-F with natural CN02 Grey linen lining.

Maximum cable length 25 m.

Nominal voltage: 300/500 V.


Operating temperature: -40°C a + 60°C.

Flame retardant testing: compliant with EN 60332-1-2/IEC 60332-1.

Normative reference: EN 50525-2-82 and IEC 60245.



ca

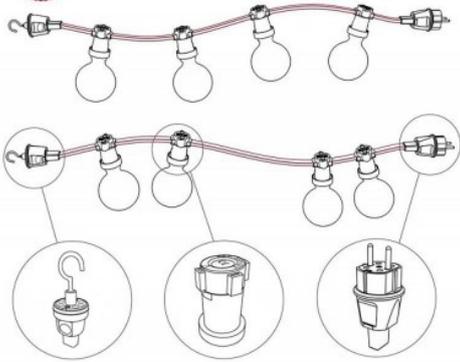

ca

