


Profile KOZEL-10-BD

Ref. A18079

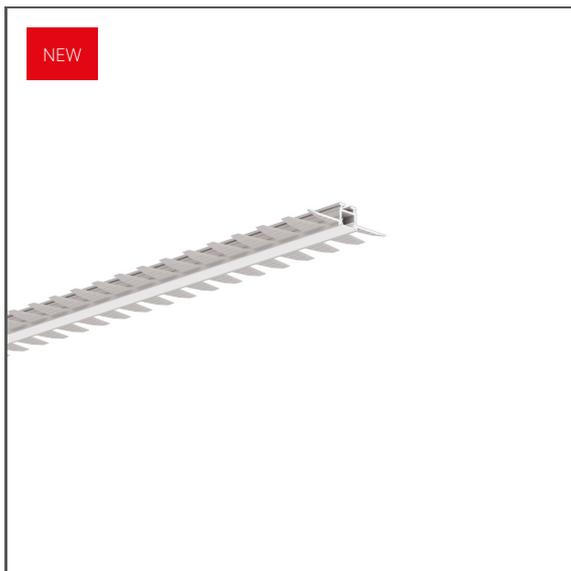

- Profile designed for bending in the lighting plane
- Mounting to drywall
- Possibility of installing sealed 5K series LED strips
- Minimum height
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

APPLICATION

- decorative lighting


MOUNTING

- in drywall, with mounting adhesive

ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-10 protective insert should be used
- smooth transition from a recessed into a suspended fixture
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

TECHNICAL DRAWING

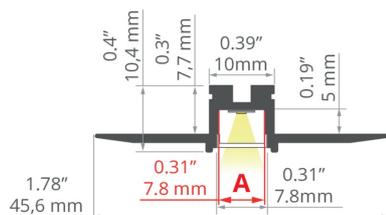

TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal
Profile cross-section	rectangular
Width	45.6 mm
Height	10.4 mm
LED gluing width A	7.8 mm
Width of the glow	7.2 mm
Max power of a single KLUŚ LED strip	9.6 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Down	500 mm
Building type	Commercial, Residential, Retail, HoReCa object, Entertainment/ Arts

Length	Ref
2005 mm	A18079N_2
3010 mm	A18079N_3

Profile KOZEL-10-BD

Ref. A18079

Facility zone	communication routes and corridors, lobby / foyer, bathroom, office, decorative, media rooms / av
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes
To cover with plaster	yes
Wire out back of extrusion	yes
Possibility of bending in the light plane	yes

SAMPLE PROJECTS



RELATED PROFILES > MINIMALISTIC



KOZEL-10
A01575

RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover BENCO-7	silicon	53 %	frosted	B17069F

RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap PIKO-ZM	ABS	black	C24307C07
		caramel (NCSS3030-Y60R)	C24307L14
		gray	C24307C02
		light sage (NCSS2010-G50Y)	C24307L12
		pastel blue (NCSS2010-B)	C24307L13
		sand (NCSS2010-Y30R)	C24307L11
End cap with hole PIKO-ZM-OTW	ABS	white	C24307C10
		black	C24307C07TW
		gray	C24307C02TW
		white	C24307C10TW

RELATED ACCESSORIES > RELATED LED > ULTRATHIN

KWP-5K-0450-24 KWP-5K-0450-24	KWP-5KSHD-0960-24 KWP-5KSHD-0960-24	K-SHD-0960-24 K-SHD-0960-24	K-0450-24 K-0450-24	K-1091-24 K-1091-24

RELATED ACCESSORIES > RELATED LED > WHITE MONO




KWP-5K-1091-24
KWP-5K-1091-24

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR
ZM-T




CONNECTOR
ZM-X



CONNECTOR
ZM-Y



CONNECTOR
ZM




CONNECTOR
ZM-NA



CONNECTOR
ZM-PION

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > TECHNICAL AND PROTECTIVE INSERTS



PROTECTIVE INSERT
TECH-10
C24533C02

RELATED ACCESSORIES > ELECTRONICS > SWITCHES



UNI-P
E61580



UNI
E61579