



- Profile designed for bending in the lighting plane
- No collision with the ceiling structure
- Line of light flush with the surface
- Non visible aluminum elements

### APPLICATION

- main and decorative lighting


### MOUNTING

- in drywall, with mounting adhesive

### ADDITIONAL INFORMATION

- in order to protect the lighting fixture during installation, a TECH-KA protective insert should be used
- when choosing a different length of profiles / covers than available in the standard, you should additionally choose the cutting service at KLUŚ

### TECHNICAL DRAWING

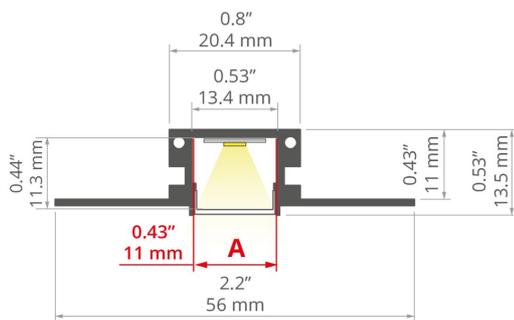

### TECHNICAL SPECIFICATIONS

Material	aluminum
Color	■ silver non anodized
Possible fixture IP	20
Possible fixture shapes	linear, polygonal, rectangular
Profile cross-section	rectangular
Width	56 mm
Height	13.5 mm
LED gluing width A	11 mm
Number of LED strips A (8 mm wide)	1
Width of the glow	11.2 mm
Max power of a single KLUŚ LED strip	24 W/m
Possibility of obtaining a line of light	yes
Possibility of bending	yes
Down	500 mm
The cover is cut to the length of the profile	yes
Can be easily connected into runs	yes
Mounting to drywall	yes

Length	Ref
2005 mm	A18080N_2
3010 mm	A18080N_3

# Profile KOZMA-BD

Ref. A18080

To cover with plaster	yes
Wire out back of extrusion	yes

## SAMPLE PROJECTS



## RELATED PROFILES > ARCHITECTURAL



**KOZMA**  
A18040

## RELATED ACCESSORIES > COVERS

NAME	MATERIAL	MATERIAL TRANSMITTANCE	COLOR	REF.
Cover HS-11	PC	59 %	frosted	B17208F
		88 %	clear	B17208C
Cover LIGER-11	PC	21 %	black	B17037B
		59 %	satın	B17037S


## RELATED ACCESSORIES > END CAPS

NAME	MATERIAL	COLOR	REF.
End cap KOZMA	PP	gray	C24217C02

RELATED ACCESSORIES > OTHER RELATED ACCESSORIES > CONNECTORS



CONNECTOR  
**ZM**

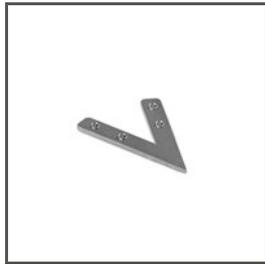

CONNECTOR  
**ZM-NA**



CONNECTOR  
**ZM-PION**