

Parts needed to mount the STOS-ALU extrusion



Exrusion (A)



End caps (B)



Cover (C)



LED strip (D)



Clip (E)



Mounting track
TEST-74 (G)


Tools needed for mounting:

- drill
- screwdriver
- screws


NOTE! All LED strips must be connected to a 12 V or 24 V power supply.

IMPORTANT: The manual presents the simplest mounting procedure.
More mounting procedures and related accessories can be found at www.klusdesign.eu


1. Drill mounting holes in the mounting track (G).

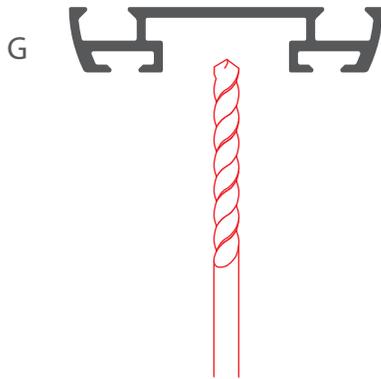

2. Attach the mounting track (G) with screws and insert the clips (E).

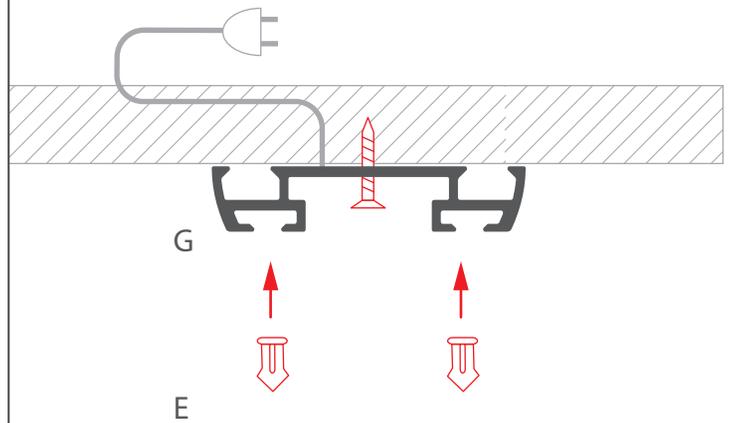

3. Mount the LED strip (D), insert the cover (C), and then insert the end cap (B).

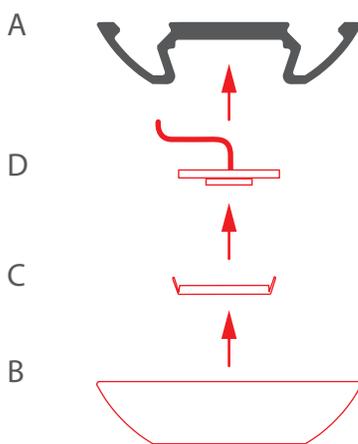

4. Attach the extrusion (A) to the mounting track (G) and connect power.

